


HAULER PRO-X



DRIVING MORE UP-TIME.

The all-new Hauler PRO X ELITE is the industry's most efficient utility vehicle. The ELITE lithium powertrain has remarkable range and is significantly lighter than traditional lead acid batteries. All of this translates into lower operational costs, saving time and money around your facility.

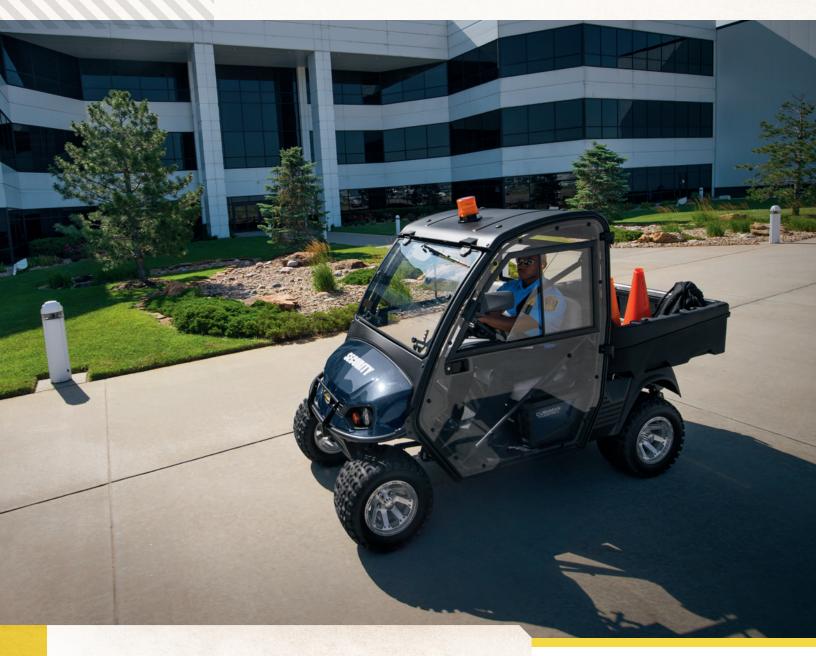











VERSATILE DASH STORAGE



ELITE LITHIUM

- Zero Maintenance
- 5-year battery warranty
- Lightweight footprint
- More efficiency

OPTIONS & ACCESSORIES

- Limited Slip Differential
- 4-Wheel Mechanical Brakes
- Locking Glove Box
- Glove Box Mat
- Floor Mount Attachment
- Windshield
- Canopy
- Power Dump
 Long Handled Tool Holders
 Interior Tool Hook
- LED Headlights
 LED Taillights

- Brakelights Hubcaps
 - Comfort Grip Steering Wheel
 - (Standard) Rearview Mirror
 - USB Port
 - Unique Key Switch
 - Hour Meter
 - Weather Enclosure
 - Cab
 - Ball Cage ROPS

RAME	Welded Steel with E-Shield $^{\rm m}$ e-coat plus DuraShield $^{\rm m}$ Powder Coat
ODY & FINISH	Injection Molded TPO, Painted
STANDARD COLOR	Forest Green
DIMENSIONS	
OVERALL LENGTH	119 in (302.26 cm)
OVERALL WIDTH	49.4 in (125.48 cm)
OVERALL HEIGHT W/CANOPY	77 in (196 cm)
WHEEL BASE	77.5 in (196.9 cm)
FRONT WHEEL TRACK	38.0 in (96.56 cm)
REAR WHEEL TRACK	38.5 in (97.79 cm)
GROUND CLEARANCE	5.5 in (14 cm)
CARGO BOX CAPACITY	12 cu ft (0.340 m ³)
POWER	
POWER SOURCE	56.7V Li-Ion Battery
MOTOR TYPE	AC Induction
HORSEPOWER (KW)	14.9 HP (11.1kW)
ELECTRICAL SYSTEM	48V Primary, 12V Auxiliary
BATTERY (QTY/TYPE)	4.2 ELiTE - Twin Pack
BATTERY CHARGER	811 Watt World Charger
KEY OR PEDAL START	Pedal
DRIVE TRAIN	Motor Shaft Direct Drive
TRANSAXLE	Differential with Helical Gears
SPEED CONTROLLER	350 Amp AC
GEAR SELECTION	Forward-Neutral-Reverse
REAR AXLE RATIO	17:1
PERFORMANCE	
SEATING CAPACITY	2 Person
CURB WEIGHT	971 lb (440 kg)
BED LOAD CAPACITY	500 lb (227 kg)
/EHICLE LOAD CAPACITY	900 lb (408 kg)
SPEED	16.5 mph +/- 0.5 mph (26.6 kph +/- 0.8 kph)
TOWING CAPACITY	1200 lb (544 kg) max
DUTSIDE CLEARANCE CIRCLE	21.5 ft (6.55 m)
STEERING & SUSPE	NSION
STEERING	Self-Compensating Rack and Pinion
FRONT/REAR SUSPENSION	Leaf Springs w/ Hydraulic Shock Absorbers
SERVICE BRAKE	Rear Wheel Mechanical Self-adjusting Drum
PARKING BRAKE	Self-compensating, Single Point Engagement
FRONT/REAR TIRES	20 x 8 - 10 (6 Ply Rated)

www.cushman.com

©2021 Textron Specialized Vehicles Inc. Features and specifications of the vehicles are subject to change without notice. Vehicle as photographed may include options not included on base model.